



Get to know your gear

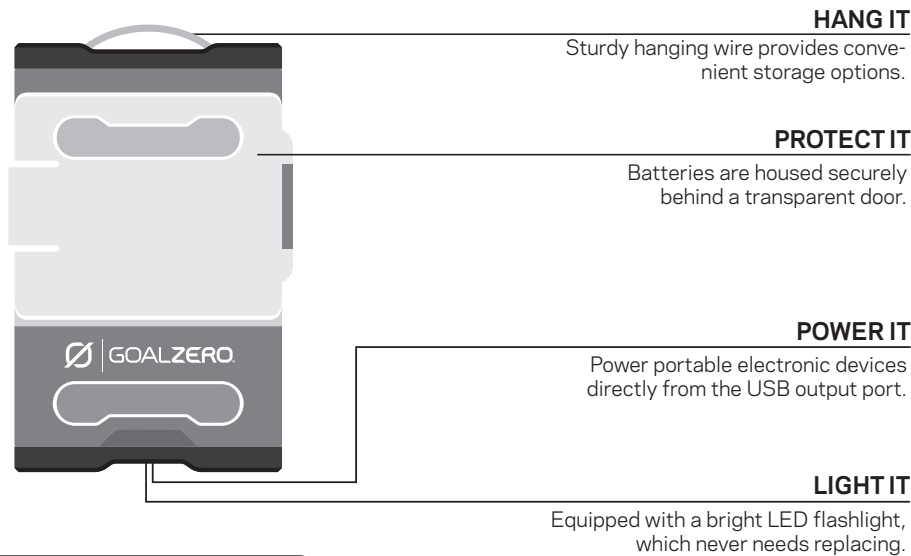


Getting Started

1. Be sure to ACTIVATE YOUR WARRANTY at www.GOALZERO.com/warranty
2. Install batteries in correct orientation.
3. Turn on and use.
4. Recharge from any GOAL ZERO Nomad solar panel or USB power source.

How to use your gear

- 1 Power switch**
Turn to 'on' to enable output; turn to the  to turn on flashlight. See legend below.
- 2 Power LED**
Indicates power and charging state. See power legend below.
- 3 USB output port**
Accepts any standard USB cable for charging USB devices. To use, turn GUIDE 10 PLUS to 'on.'
- 4 LED Flashlight**
100+ hours of light per charge. Turn on with power switch.
- 5 Solar charging port**
Recharge from GOAL ZERO Nomad 7 or Nomad 3.5 solar panels.
- 6 Mini-USB charging port**
Recharge from USB sources, like a computer.

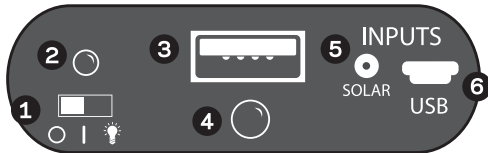

GUIDE 10 PLUS power legend:

WHEN CHARGING FROM NOMAD 3.5	WHEN CHARGING FROM NOMAD 7	WHEN IN USE	Legend
RED BLINKING 0-50%	SLOW RED BLINKING 0-50%	SOLID GREEN POWER AVAILABLE	○ - "OFF" - USB Output disabled. ↑ - "ON" - USB Output ON.
GREEN BLINKING 50-100%	SLOW GREEN BLINKING 50-80%	SOLID ORANGE LOW WARNING	💡 - "LIGHT" - LED Light is ON. - USB Output Disabled. - Store in "OFF" position. - Charges in any switch position.
	FAST GREEN BLINKING 80-100%	SOLID RED NO POWER AVAILABLE	
6 HOURS EXPECTED CHARGE TIMES IN GOOD SUN	3 HOURS EXPECTED CHARGE TIMES IN GOOD SUN		
8 HOURS EXPECTED CHARGE TIMES FROM USB			

Technical Specs

Usage	
Charges from the following:	Approx. charge time:
Any USB power source	6-10 hours
GOAL ZERO Nomad 3.5 (solar port)	6-8 hours
GOAL ZERO Nomad 7 (solar port)	3-6 hours
Inputs	
USB-mini port	5V, up to 0.8A max (4W)
Solar port	6.5V, 1.5A max (7W)
Outputs	
Batteries	4x AA or AAA** NiMH cells
USB standard port	5.0V, up to 1.0A (5W)
Flashlight	100mW white LED, 100+ hours*
Internal	
Battery capacity	11 Wh*, (5V, 2300 mAh) use only NiMH cells
Life-span	hundreds of cycles*
Shelf Life	12 months*
General	
Weight w/ batteries	0.4 lbs (181 g)
Dimensions	2.5 x 4 x 0.75 in (6 x 10 x 2 cm)
Warranty	12 months
Certifications	FCC and CE
Optimal operating temp.	32-104°F (0-40°C)

*When using GOAL ZERO NiMH rechargeable low self-discharge AA cells.
** AAA cell are sold separatley and come with an adapter. Go to GOAL ZERO.com for more info

Frequently Asked Questions

What batteries can be used?

- Any AA or AAA** NiMH batteries can be used and recharged.
- We do not recommend other types of batteries.
- 4 same-sized batteries MUST be charged at once, but not all batteries need to be empty.

How do I charge?

- From Solar: Use GOAL ZERO Nomad 3.5 or Nomad 7 with solar charge cable for fast charging.
- From USB: Use any USB power source, such as a computer or any GOAL ZERO power pack.

Is it waterproof?

No, but it is weather-resistant. Care should be taken to shield it from direct sunlight and the elements. Unexpected rain storms probably won't harm it.

How is it protected?

Usage is plug-and-play. The built-in battery management system prevents over-charging and over-discharging of batteries. The USB output will only supply the amount of power needed.

Comes With:

Mini-USB charging cord
Solar charging cord

Compatible With:

Hand-held USB devices, like:

Cell phone, Smart phone
GPS, MP3 player
Tablet

GOAL ZERO products:

NOMAD solar panels
LUNA, BOLT, BLAZE lights

- Fill out your warranty
- Watch demo video
- Download this manual

CONTACT US:

Toll Free: 888.794.6250
675 West 14600 South
Bluffdale, UT, 84065

WWW.GOALZERO.COM



We proudly support Tifie Humanitarian
WWW.TIFIE.ORG